


ACB

301168-DL

301x168x364mm(11.85"x6.61"x14.33")

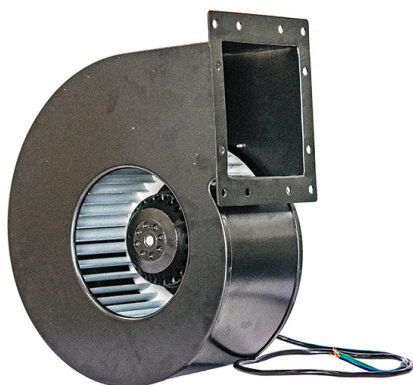

MOTOR	Outer rotor motor Ø 92mm
IMPELLER	Metal
BEARING	Ball
INSULATION	Class F
OPERATING TEMPERATURE	-30°C to + 65°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
WEIGHT	7.2 kgs
ROHS COMPLIANCE	YES
IP LEVEL	IP54 (Special IP Rating On Request)



301mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACB301168V2H4P-DL	220	1.0/1.14	200/240	1220/960	1.04/1.49	26.4/37.7	506/436	14.3/12.3	65/61


SYMBANG

DIMENSION

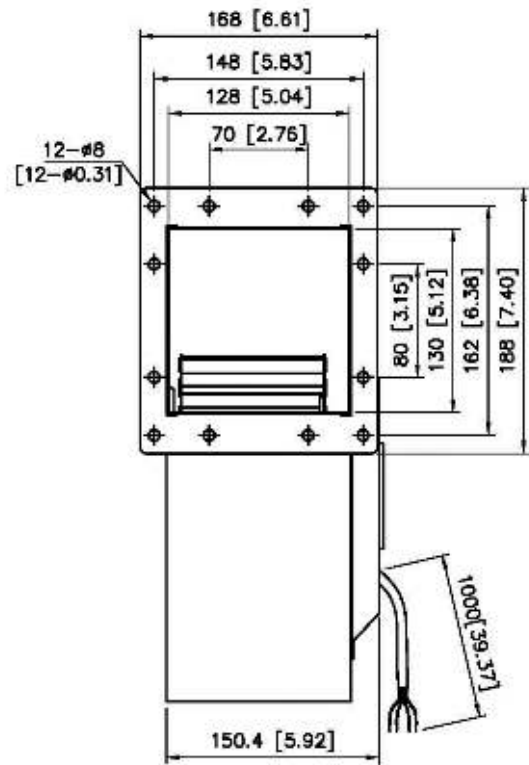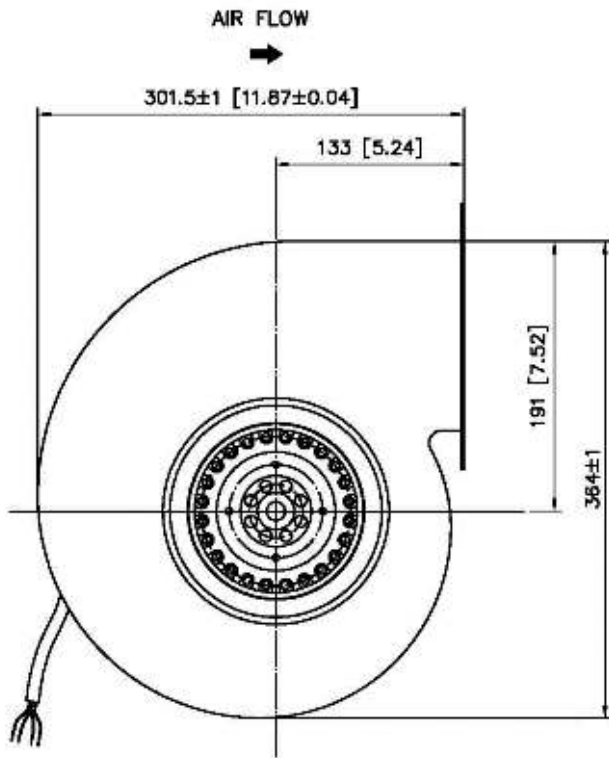

UNIT: mm[inch]

WIRING DIAGRAM

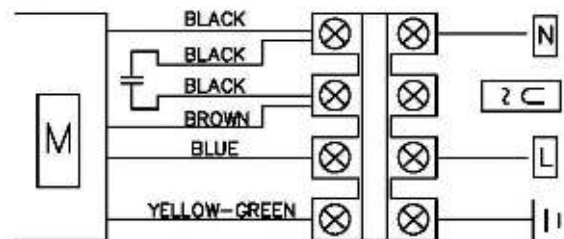

AIR PERFORMANCE

