

ACB

226130-AZ



226x130x263mm(8.9"x5.12"x10.35")




MOTOR	Outer rotor motor Ø 92mm
IMPELLER	Metal
BEARING	Ball
INSULATION	Class F
OPERATING TEMPERATURE	-30°C to + 65°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
WEIGHT	2.6 kgs
ROHS COMPLIANCE	Yes
IP LEVEL	IP44 (Special IP Rating On Request)

226mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACB226130V2H2P-AZ	230	0.71/0.68	190/225	2140/2060	1.6/2.0	40.8/52.0	535/525	15.1/14.8	64/63
ACB226130V1H2P-AZ	115	1.72	225	2060	2.0	52.0	525	14.8	63.0

DIMENSION

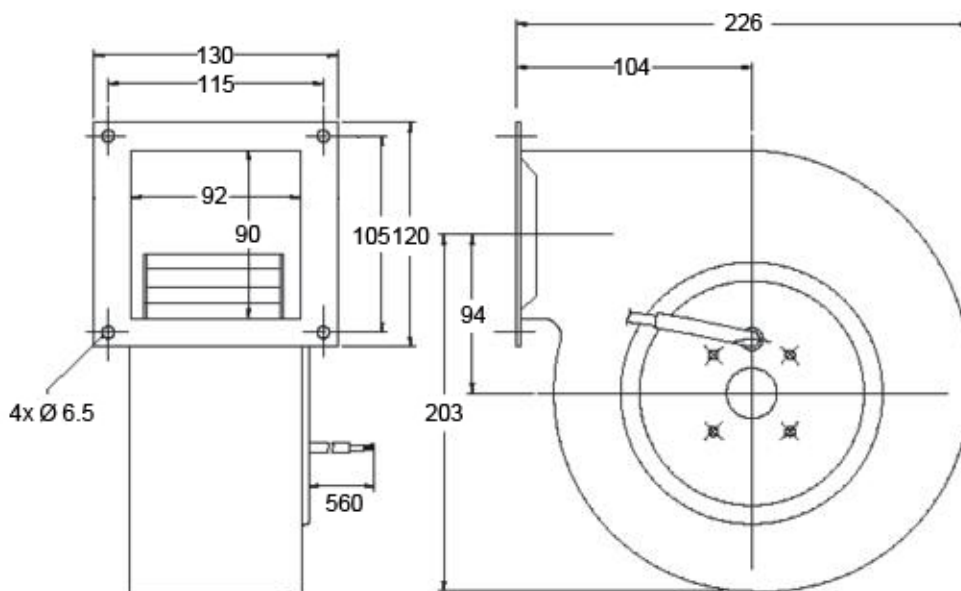

AIR PERFORMANCE

