

AD

9225-SA

92x92x25mm(3.62"x3.62"x1.0") **CE**




HOUSING	Aluminum-Alloy Die Castings ADC12
IMPELLER	Aluminum-Alloy Die Castings ADC12
BEARING	Ball
OPERATING TEMPERATURE	-55°C to +85°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	200 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

92mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AD9225V26H-SA	26	0.46	12	5600	1	24.2	80	2.26	66

DIMENSION

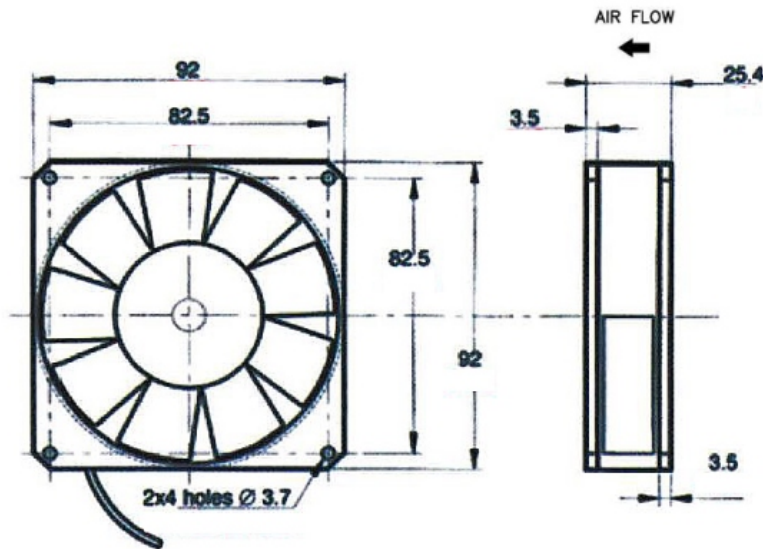

Unit : mm

AIR PERFORMANCE

