DCF

10025-Y

CE

Ø100x25mm(Ø3.94"x0.98")



HOUSING
IMPELLER
BEARING
OPERATING TEM

OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH

WEIGHT ROHS COMPLIANCE

IP LEVEL

Thermoplastic PBT, UL94V-0

Thermoplastic PBT, UL94V-0

Ball

-10°C to +70°C

 $10M~\Omega$ min. @500 VDC

5mA Max. at 500 VAC for 1 minute


130g Yes

IP21 (Special IP Rating On Request)

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE
					inchH2O	mmH2O	CFM	m3/min	dB(A) @1M
DCF10025V24M-Y	24	0.55	13.2	5200	1.73	43.86	54	1.53	57.5
DCF10025V24H-Y	24	0.85	20.4	6400	2.54	64.36	62	1.76	63.5

DIMENSION

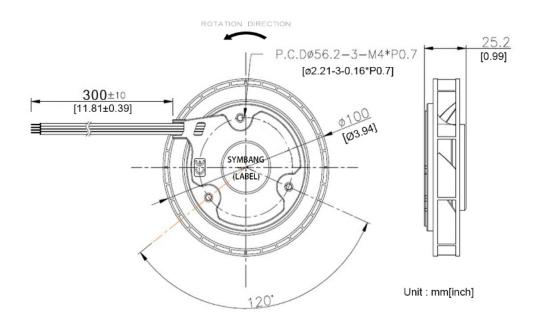

AIR PERFORMANCE	_
×	