



HOUSING Housing: PC+ABS; Housing bottom plate: SECC IMPELLER

Thermoplastic PBT, UL94V-0

Ball

-10°C to +60°C

DIELECTRIC STRENGTH 5mA Max. at 500 VAC for 1 minute

INSULATION RESISTANCE 10M Ω min. @500 VDC

320g WEIGHT

ROHS COMPLIANCE Yes

OPERATING TEMPERATURE


BEARING

IP LEVEL IP21 (Special IP Rating On Request)

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE
					inchH2O	mmH2O	CFM	m3/min	dB(A) @1M
DB12728V24H-Y	24	0.85	20.4	6400	3.30	83.76	51.00	1.443	64.5

DIMENSION

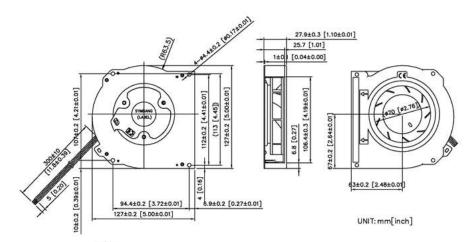

NOTE : LEAD WIRES : WIRE UL 1007#24AWG

- 1. RED WIRE----(+)
- 2. BLACK WIRE--(-)
- 1. BLUE WIRE---(PWM)
 1. YRLLOW WIRE- (FG)

AIR PERFORMANCE	_
×	