

E

12038D-YH3

120x120x38mm(4.72"x4.72"x1.49")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT+30% Fiber glass, UL94V-0
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	-10°C to + 60°C
OPERATING VOLTAGE RANGE	80 VAC to 130VAC for 110V Type 100 VAC to 240 VAC for 220V Type
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Brushless EC Motor
TERMINATION	Lead Wire
WEIGHT	294.5 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

120mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
E12038V1HBLD-YH3	110		30	4500	1.00	25.50	209.10	5.94	64.7
E12038V2HBLD-YH3	220		30	4500	1.00	25.50	209.10	5.94	64.7

DIMENSION

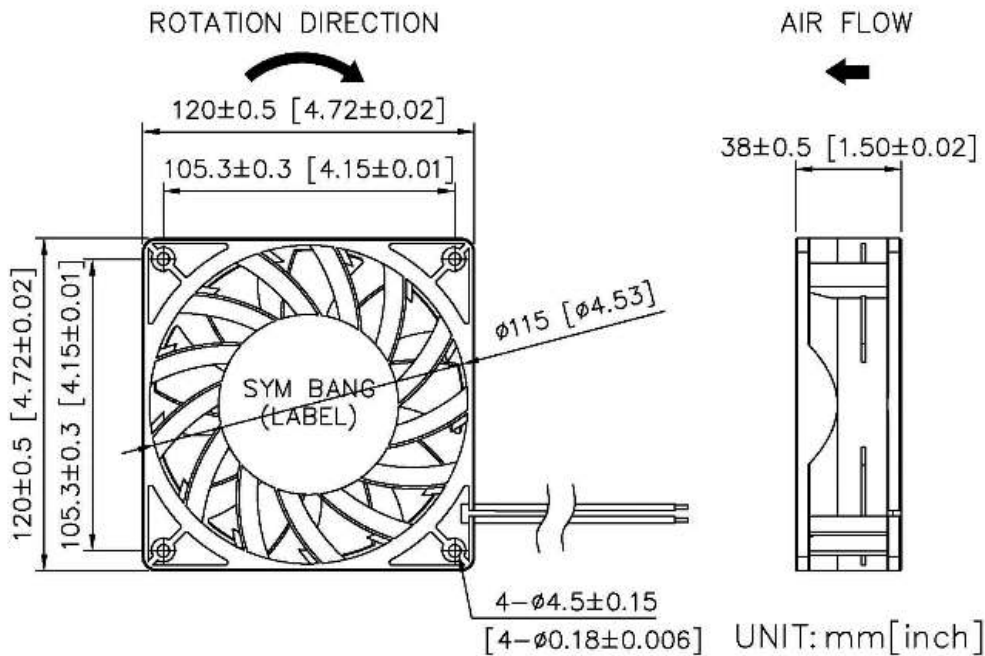

SYMBANG

AIR PERFORMANCE

