


E

8038D-YH

80x80x38mm(3.15"x3.15"x1.5") **CE**

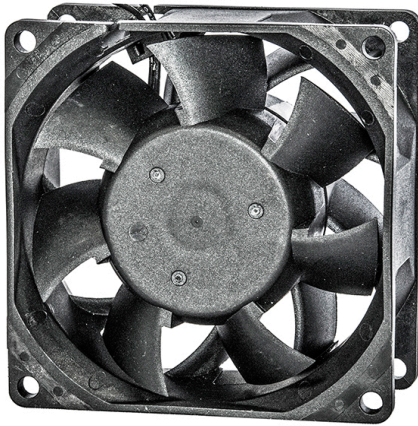


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	-10°C to + 70°C
OPERATING VOLTAGE RANGE	90 VAC to 130VAC for 110V Type 100 VAC to 240 VAC for 220V Type
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Brushless EC Motor
TERMINATION	Lead Wire
WEIGHT	177.6 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

80mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
E8038V1HBLD-YH	110		9	5000	0.45	11.5	62.3	1.76	52.1
E8038V2HBLD-YH	220		9	5000	0.45	11.5	62.3	1.76	52.1

DIMENSION

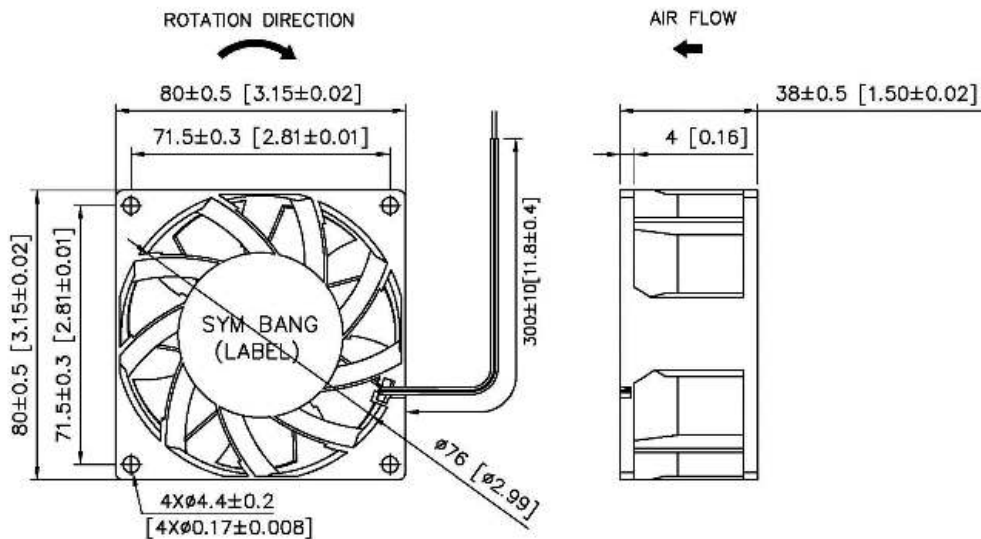

UNIT: mm[inch]

AIR PERFORMANCE

