

AFS 60



Ø60mm(Ø2.36")





HOUSING	Metal/Aluminum
IMPELLER	Aluminum,Ø60mm
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	0°C to + 45°C
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Impedance Protected
MOTOR TYPE	Shaded Pole Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

60 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AFS60184V1H	120	0.55	37	2500	0.29	7.3	106	3.0	47
AFS60184V1L	120	0.33	23	1700	0.15	3.8	63	1.8	35
AFS60184V2H	230	0.27	34	2500	0.21	5.4	106	3.0	47
AFS60184V2L	230	0.17	23	2000	0.15	3.7	88	2.5	39
AFS60245V1H	120	0.6	42	2000	0.20	5.1	106	3.0	42
AFS60245V1L	120	0.42	31	1900	0.19	4.9	102	2.9	41
AFS60245V2H	230	0.27	35	2200	0.18	4.6	133	3.8	44
AFS60245V2L	230	0.23	31	2000	0.15	3.9	118	3.3	42
AFS60306V1H	120	0.63	42	1900	0.19	4.7	114	3.2	42
AFS60306V2H	230	0.28	36	2200	0.18	4.6	154	4.4	44
AFS60368V1H	120	0.64	43	1700	0.12	3	133	3.8	41
AFS60368V2H	230	0.3	38	1900	0.17	4.2	167	4.7	43
AFS60429V1H	120	0.64	44	1400	0.09	2.2	139	3.9	41
AFS60429V2H	230	0.31	40	1800	0.13	3.3	180	5.1	43

DIMENSION

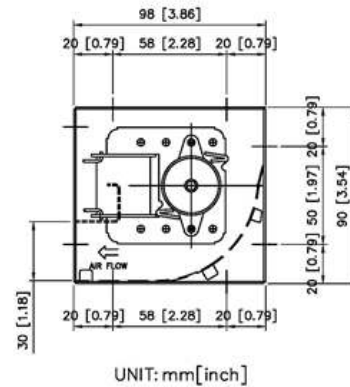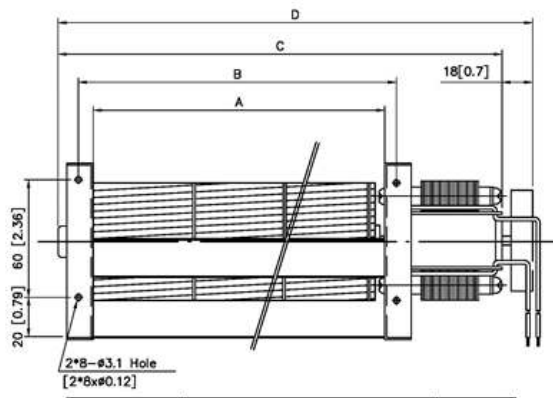

MODEL NO.	DIMENSION(mm)				WEIGHT (g)
	A	B	C	D	
AFS60184H	184	199	262	280	1350
AFS60184L	184	199	257		1200
AFS60245H	245	260	323	341	1500
AFS60245L	245	260	323		1400
AFS60306	306	321	384	402	1500
AFS60368	368	383	446	464	1600
AFS60429	429	444	507	525	1650

AIR PERFORMANCE

