

DSB

6390-TK



63x67x90mm(2.4"x2.6"x3.5")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	532g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)





63 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DSB6390V24HB-TK	24	2.9	69.6	44000	42.9	1089	18.9	0.535	71.9

SYMBANG

DIMENSION

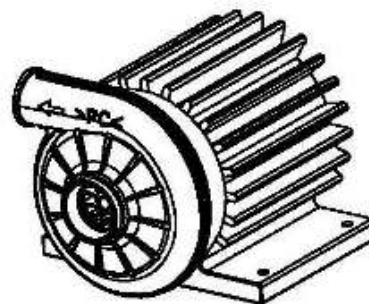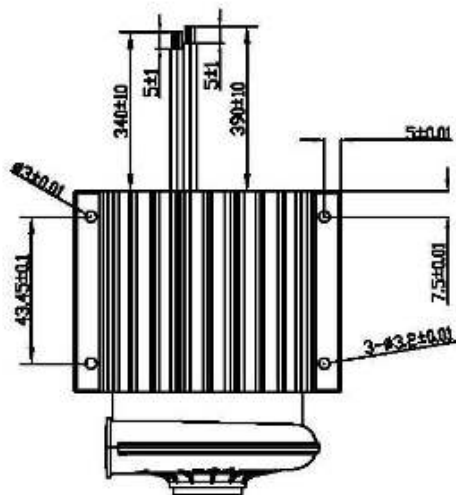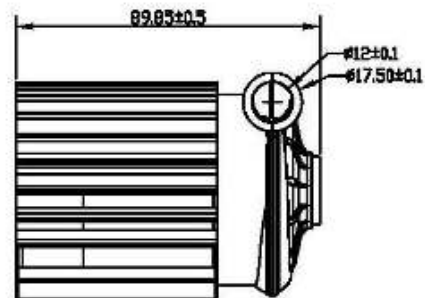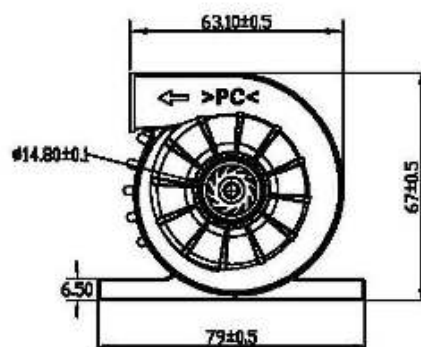

UNIT: $\frac{\text{mm}}{(\text{INCH})}$

LEAD WIRE:

UL 1007#20AWG OR EQUIVALENT

1: BLACK WIRE—(-)

2: RED WIRE—(+)

UL 1007#24AWG OR EQUIVALENT

3: YELLOW WIRE—(FG)

4: BLUE WIRE—(PWM)

AIR PERFORMANCE

