

DSB

8351-TK

87x83x51mm(3.42"x3.27"x2")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-40°C to +65°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	360 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

87 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DSB8351V24H-TK	24	6.6	158.4	43300	49.57	1259.3	27.5	0.77	80.1

DIMENSION

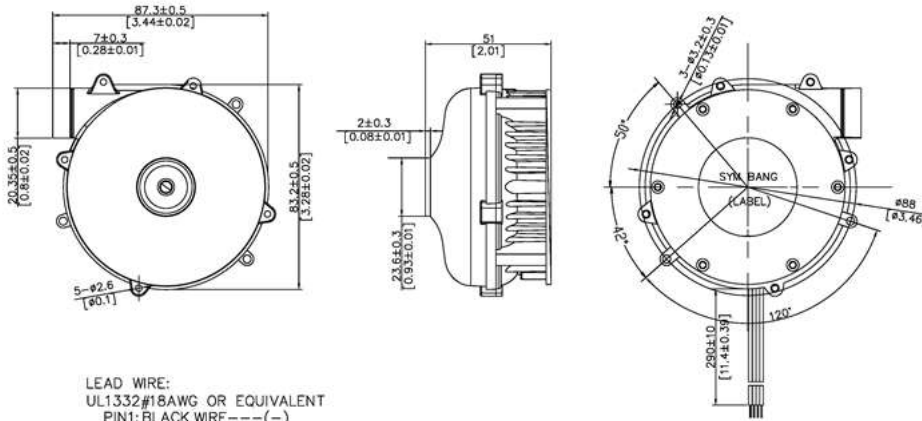

LEAD WIRE:
UL1332#18AWG OR EQUIVALENT
PIN1: BLACK WIRE ---(-)
PIN2: RED WIRE ---(+)
UL1007#18AWG OR EQUIVALENT
PIN3: YELLOW WIRE --- (FG)
PIN4: BLUE WIRE --- (PWM)

Unit : mm[inch]

AIR PERFORMANCE

