

# DCF

# 12028-TK

# CE

Ø120x28mm(Ø4.72"x1.1")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0, Aluminum
BEARING	Ball
OPERATING TEMPERATURE	-10°C to +70°
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	222 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


# 120

mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF12028V12H-TK	12	0.7	8.4	6500	1.23	31.1	24.93	0.71	54.6

## DIMENSION

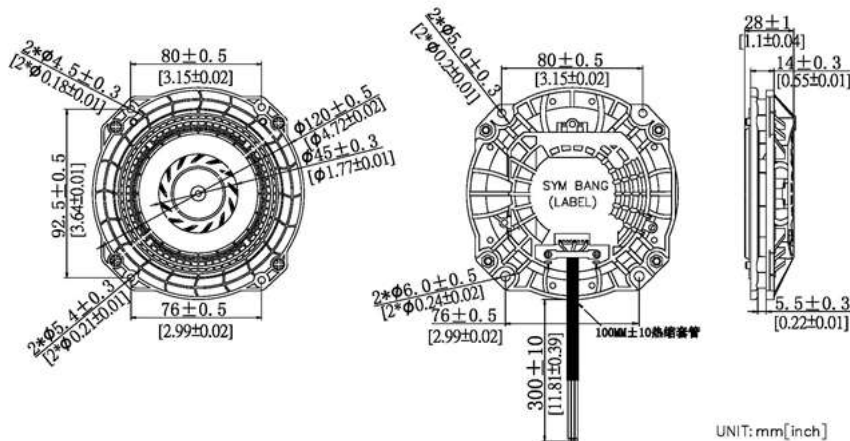

LEAD WIRE UL1007#22WG  
OR EQUIVALENT  
PIN1:Black WIRE--(-)  
PIN2:Blue WIRE--(PWM)  
PIN3:Red WIRE--(+)

SYMBANG

## AIR PERFORMANCE

