



HOUSING IMPELLER BEARING

OPERATING TEMPERATURE
DIELECTRIC STRENGTH
INSULATION RESISTANCE

WEIGHT ROHS COMPLIANCE

IP LEVEL

Aluminum Die Casting, Painted Black

PPE+PS+30%GF Black

Ball

-20°C to +70°C

5mA Max. at 500 VAC for 1 minute

10M Ω min. @500 VDC


1.5 kg Yes

IP21(Special IP Rating On Request)

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE
					inchH2O	mmH2O	CFM	m3/min	dB(A) @1M
D20070V48HD-Y	48	10.7	514	8000	5.77	140.79	1093	30.94	81

DIMENSION

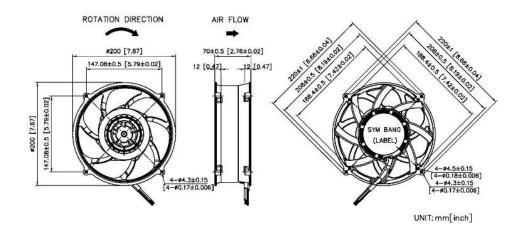

AIR PERFORMANCE

