

220x200x51mm(8.66"x7.87"x2.01"))



HOUSING
IMPELLER
BEARING
OPERATING TEMPER
DIFLECTRIC STRENG

OPERATING TEMPERATURE
DIELECTRIC STRENGTH
INSULATION RESISTANCE
WEIGHT
ROHS COMPLIANCE
IP LEVEL

Aluminum Die Casting, Painted Black

PPE+PS+30%GF Black

Ball

-20°C to +70°C

5mA Max. at 500 VAC for 1 minute

10M Ω min. @500 VDC


990 g Yes

IP21(Special IP Rating On Request)

SPECIFICATION

MODEL NO.	RATED	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE
	VOLTAGE(V)				inchH2O	mmH2O	CFM	m3/min	dB(A) @1M
D20051V48H	Y 48	2.5	120	6500	4.84	122.94	693	19.61	75

DIMENSION

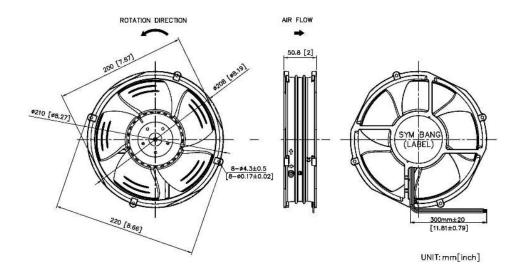

AIR PERFORMANCE

