

DM 2656

Ø26X56mm(Ø1.02"x2.21")




MOTOR TYPE	Brushless Motor
BEARING	Ball Bearing
OPERATING TEMPERATURE	-20°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
TERMINATION	Lead Wire or Terminal
WEIGHT	115 g

26_{mm}

26 mm

DIMENSION

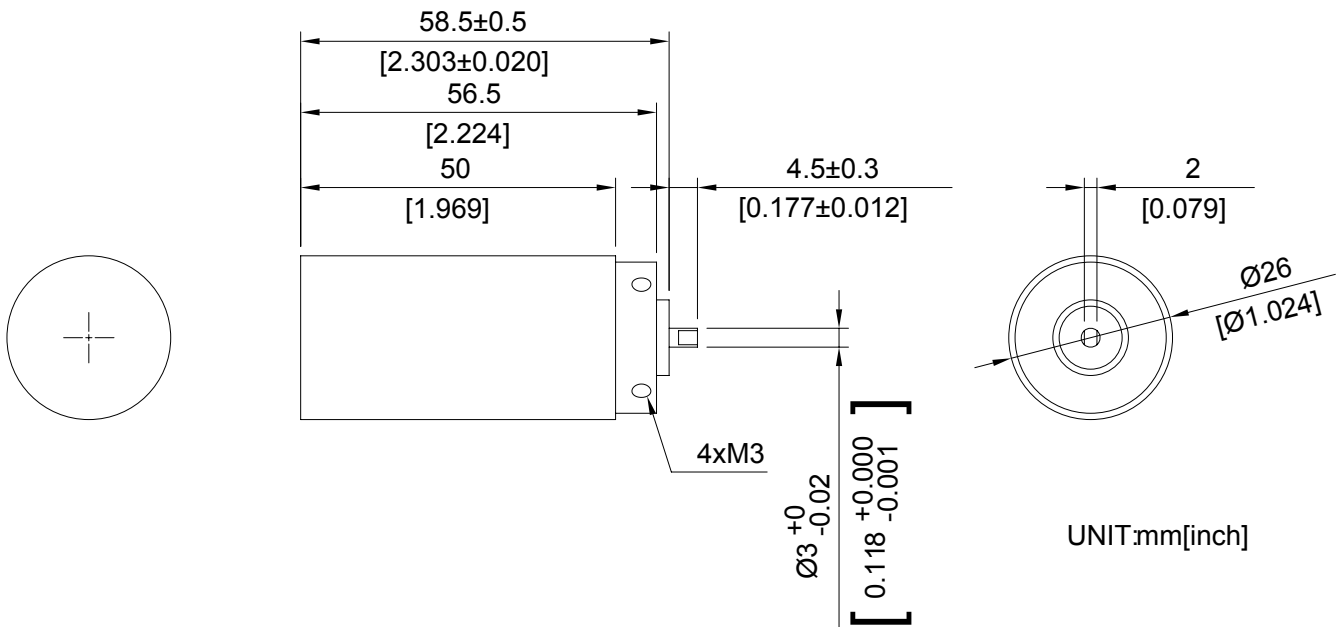

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	OUTPUT POWER (W)	SPEED (RPM)	NOISE dB(A) @1M
DM2656V30HB	30	0.27	79	20700	-