

DM 3026 Ø30x26mm(Ø1.17"x1.01")




MOTOR TYPE	Mini Brushless Motor
BEARING	Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
TERMINATION	Lead Wire
WEIGHT	4.5 g
IP LEVEL	IP21 (Special IP Rating On Request)

30 mm

30 mm

DIMENSION

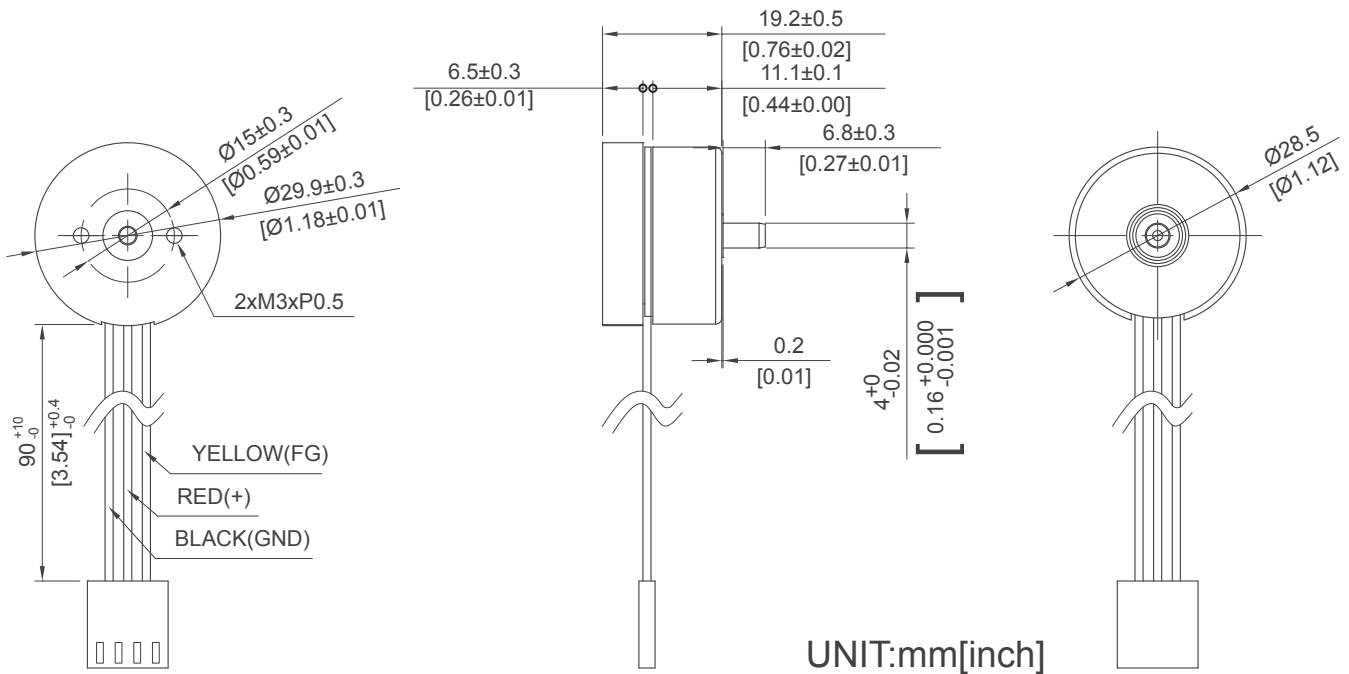

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	NOISE dB(A) @1M
DM1306V5HS	5	0.066	0.33	18000	-