

# DM 3056 Ø30X56mm(Ø1.18"x2.20")




**MOTOR TYPE** Brushless Motor  
**BEARING** Ball Bearing  
**OPERATING TEMPERATURE** -20°C to + 70°C  
**DIELECTRIC STRENGTH** 5mA Max. at 500 VAC for 1 second  
**INSULATION RESISTANCE** 10M Ω min. @500 VDC  
**TERMINATION** Lead Wire or Terminal  
**WEIGHT** 300 g

# 30 mm

30 mm

## DIMENSION

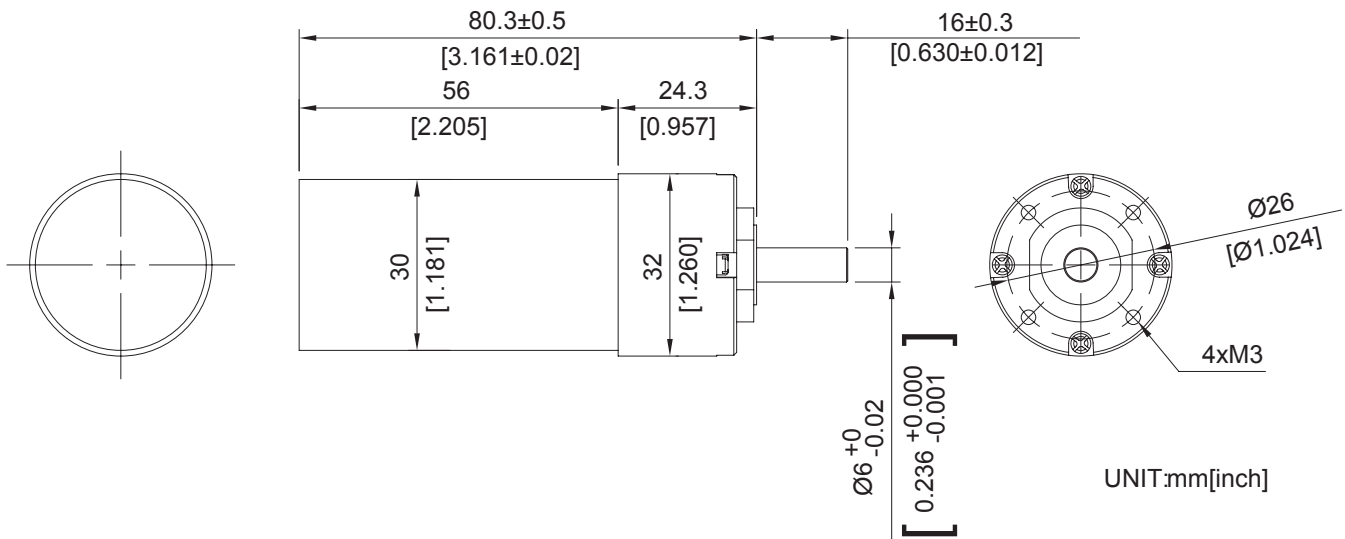

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	OUTPUT POWER (W)	SPEED (RPM)	NOISE dB(A) @1M
DM3056V24HB	24	0.17	57.98	10440	-